

THERMOPLASTIC

8F0LA ONE WIRE BRAID THERMOPLASTIC ALFAGOMMA PROPRIETARY HOSE	1
8F1LA ONE WIRE BRAID THERMOPLASTIC - TWIN ALFAGOMMA PROPRIETARY HOSE	2
8G0LA FLEXOR 7 - TWIN SAE 100 R7 - EN 855 R7	3
8G1LA FLEXOR 7 SAE 100 R7 - EN 855 R7	4
8H8LA MINIMESS (PRESSURE TEST POINT) ALFAGOMMA PROPRIETARY HOSE	5
FLEXOPAK PLT ALFAGOMMA PROPRIETARY HOSE	6

TEXTILE BRAID

806AA FLEXOR 6 SAE 100 R6 - EN 854 R6	7
860AA FLEXOR 2TE EN 854 2TE	8
865AA FLEXOR 3TE EN 854 3TE	9
870AA FLEXOR 3 SAE 100 R3 - EN 854 R3	10

WIRE BRAID

805AA FLEXOR 5 SAE 100 R5	11
8N6AA FLEXOPAK 2SC SAE 100 R16 - EN 857 2SC	12
835AA FLEXOR 1SN - R1AT EN 853 1SN (up to 2") - SAE 100 R1AT	13
840AA FLEXOR 2ST - R2A EN 853 2ST (up to 2") - SAE 100 R2A	14

	Pag.
WIRE BRAID	
845AA	15
FLEXOR 2SN - R2AT	
EN 853 2SN - SAE 100 R2AT	
8C7AA	16
FLEXOPAK 1SC	
EN 857 1SC	
8D2AA	17
FLEXOPAK 3	
ALFAGOMMA PROPRIETARY HOSE	
8D8AA	18
FLEXOPAK PLT	
ALFAGOMMA PROPRIETARY HOSE	
8I3AA	19
FLEXOPAK 16	
SAE 100 R16	
WIRE SPIRAL	
809AA	20
FLEXOR 13 MSHA	
SAE 100 R13 - EN 856 R13	
809AH	21
FLEXOR 13R MSHA - RED COVER	
SAE 100 R13 - EN 856 R13	
850AA	22
FLEXOR 4SP MSHA	
EN 856 4SP	
855AA	23
FLEXOR 4SH MSHA	
EN 856 4SH	
898AA	24
FLEXOR 12 MSHA	
SAE 100 R12 - EN 856 R12	
898AB	25
FLEXOR 12G MSHA - GREY COVER	
SAE 100 R12 - EN 856 R12	
ALFATECH - PRESSURE RATED RANGE	
833AA	26
AT3K	
SAE 100 R17 - EN 857 1SC (up to 3/8")	
894AA	27
AT4K	
ALFAGOMMA PROPRIETARY HOSE	

	Pag.
ALFATECH - PRESSURE RATED RANGE	
896AA	28
AT5K	
ALFAGOMMA PROPRIETARY HOSE	
897AA	29
AT6K	
SAE 100 R15	
8D4AA	30
AT7K	
ALFAGOMMA PROPRIETARY HOSE	
8E9AA	31
AT8K	
ALFAGOMMA PROPRIETARY HOSE	
MINETUFF -MSHA- ABRASION RES.	
8M8AA	32
AT3K MINETUFF - MSHA	
SAE 100 R17 - EN 857 1SC (up to 3/8")	
8N1AA	33
AT4K MINETUFF - MSHA	
ALFAGOMMA PROPRIETARY HOSE	
8N2AA	34
AT5K MINETUFF - MSHA	
ALFAGOMMA PROPRIETARY HOSE	
8N3AA	35
AT6K MINETUFF - MSHA	
ALFAGOMMA PROPRIETARY HOSE	
SUPERTUFF - MSHA - ABRASION RESISTANT	
877AA	36
AT3K SUPERTUFF - MSHA	
SAE 100 R17	
8A6AA	37
AT5K SUPERTUFF -MSHA	
ALFAGOMMA PROPRIETARY HOSE	
8D9AA	38
AT4K SUPERTUFF - MSHA	
ALFAGOMMA PROPRIETARY HOSE	
8L7AA	39
AT6K SUPERTUFF - MSHA	
SAE 100 R15	
HIGH & LOW TEMPERATURE APPLICATIONS	
814AE	40
TEMP TECH 1SN - BLUE COVER	
EN 853 1SN - SAE 100 R1AT	

HIGH & LOW TEMPERATURE APPLICATIONS

819AA

FLEXOR 1SN-HT

EN 853 1SN - SAE 100 R1AT

41

828AE

TEMP TECH 2SN - BLUE COVER

EN 853 2SN - SAE 100 R2AT

42

8E6AA

FLEXOPAK 2 LT

EN 857 2SC - SAE 100 R16

43

8E7AA

FLEXOPAK 3 LT

ALFAGOMMA PROPRIETARY HOSE

44

OIL RETURN LINE

605AA

FLEXOR 4

SAE 100 R4

45

PRESSURE WASH

8B3AA

ALFAJET 210 - BLACK COVER

ALFAGOMMA PROPRIETARY HOSE

46

8B3AE

ALFAJET 210 - BLUE COVER

ALFAGOMMA PROPRIETARY HOSE

47

8B4AA

ALFAJET 400 - BLACK COVER

ALFAGOMMA PROPRIETARY HOSE

48

8B4AE

ALFAJET 400 - BLUE COVER

ALFAGOMMA PROPRIETARY HOSE

49

8D1AA

ALFAJET 315 - BLACK COVER

ALFAGOMMA PROPRIETARY HOSE

50

8D1AE

ALFAJET 315 - BLUE COVER

ALFAGOMMA PROPRIETARY HOSE

51

WATER BLASTING

881AA

FLEXORBLAST 50K

ALFAGOMMA PROPRIETARY HOSE

52

889AA

FLEXORBLAST 30K

ALFAGOMMA PROPRIETARY HOSE

53

	Pag.
WATER BLASTING	
890AA	54
<i>FLEXORBLAST 36K</i>	
<i>ALFAGOMMA PROPRIETARY HOSE</i>	
891AA	55
<i>FLEXORBLAST 45K</i>	
<i>ALFAGOMMA PROPRIETARY HOSE</i>	
8B7AA	56
<i>FLEXORBLAST 25K</i>	
<i>ALFAGOMMA PROPRIETARY HOSE</i>	
SLIM HOLE - DRILLING RIGS	
170AA	57
<i>FLEXOR SLIM HOLE</i>	
<i>ALFAGOMMA PROPRIETARY HOSE</i>	

8F0LA
**ONE WIRE BRAID THERMOPLASTIC
ALFAGOMMA PROPRIETARY HOSE**

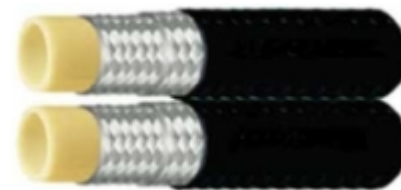

Tube	THERMOPLASTIC POLYESTER
Reinforcement	ONE HIGH TENSILE STEEL BRAID (1B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT THERMOPLASTIC POLYURETHANE-PIN PRICKED
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +93°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8F0LA00500AF00	5	3/16	-3	9,4	0,37	27,5	4000	110	16000	90	3,6	0,11	7
8F0LA00600AF00	6	1/4	-4	11,7	0,46	27,5	4000	110	16000	100	4	0,16	11
8F0LA00800AF00	8	5/16	-5	13,4	0,53	21	3000	84	12000	115	4,6	0,18	12
8F0LA01000AF00	10	3/8	-6	15,1	0,59	21	3000	84	12000	125	5	0,25	17
8F0LA01200AF00	13	1/2	-8	18,4	0,72	17,5	2500	70	10000	170	6,8	0,28	19

THERMOPLASTIC**8F1LA****ONE WIRE BRAID THERMOPLASTIC - TWIN****ALFAGOMMA PROPRIETARY HOSE**

Tube	THERMOPLASTIC POLYESTER
Reinforcement	ONE HIGH TENSILE STEEL BRAID (1B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT THERMOPLASTIC POLYURETHANE-PIN PRICKED
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +93°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	
Note	

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8F1LA00600AF00	6	1/4	-4	11,7	0,46	27,5	4000	110	16000	100	4	0,32	21
8F1LA00800AF00	8	5/16	-5	13,4	0,53	21	3000	84	12000	115	4,6	0,35	23
8F1LA01000AF00	10	3/8	-6	15,1	0,59	21	3000	84	12000	125	5	0,5	34

8G0LA
FLEXOR 7 - TWIN
SAE 100 R7 - EN 855 R7


Tube	THERMOPLASTIC POLYESTER
Reinforcement	Two high tensile textile braids and two tensile steel braids
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT THERMOPLASTIC POLYURETHANE-PIN PRICKED
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +93°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	
Note	S.F.: 4:1

Code	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
	mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
8G0LA00500AG00	5	3/16	-3	9,6	0,38	21	3000	84	12000	75	3	0,13	9
8G0LA00600AG00	6	1/4	-4	12,2	0,48	21	3000	84	12000	100	4	0,19	13
8G0LA00800AG00	8	5/16	-5	14,4	0,57	17,5	2500	70	10000	115	4,6	0,25	17
8G0LA01000AG00	10	3/8	-6	15,9	0,63	15,5	2250	62	9000	125	5	0,29	19
8G0LA01200AG00	13	1/2	-8	20,3	0,8	14	2000	56	8000	175	7	0,43	29

THERMOPLASTIC**8G1LA****FLEXOR 7****SAE 100 R7 - EN 855 R7**

Tube	THERMOPLASTIC POLYESTER
Reinforcement	Two high tensile textile braids and two tensile steel braids
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT THERMOPLASTIC POLYURETHANE-PIN PRICKED
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +93°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	
Note	S.F.: 4:1

Code	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
	mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
8G1LA00400AG00	4	5/32		8,1	0,32	21	3000	84	12000	38	1,5	0,05	3
8G1LA00500AG00	5	3/16	-3	9,6	0,38	21	3000	84	12000	75	3	0,07	5
8G1LA00600AG00	6	1/4	-4	12,2	0,48	21	3000	84	12000	100	4	0,1	7
8G1LA00800AG00	8	5/16	-5	14,4	0,57	17,5	2500	70	10000	115	4,6	0,13	9
8G1LA01000AG00	10	3/8	-6	15,9	0,63	15,5	2250	62	9000	125	5	0,15	10
8G1LA01200AG00	13	1/2	-8	20,3	0,8	14	2000	56	8000	175	7	0,22	15

8H8LA
MINIMESS (PRESSURE TEST POINT)
ALFAGOMMA PROPRIETARY HOSE



Tube	THERMOPLASTIC POLYESTER
Reinforcement	ONE HIGH TENSILE TEXTILE BRAID
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT THERMOPLASTIC POLYURETHANE-PIN PRICKED
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER. SPECIALLY DESIGNED FOR PRESSURE GAUGES AND TRANSDUCERS CONNECTIONS
Constant operation	-40°C +93°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	
Note	S.F.: 4:1

Code	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
	mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
8H8LA002000000	2	5/64		5	0,2	60	8700	240	34800	25	1	0,02	1

THERMOPLASTIC**FLEXOPAK PLT****ALFAGOMMA PROPRIETARY HOSE**

Tube	THERMOPLASTIC SYNTHETIC POLYMER
Reinforcement	ONE HIGH TENSILE TEXTILE BRAID
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT THERMOPLASTIC POLYURETANE
Application	MEDIUM PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER. SPECIALLY DESIGNED FOR HYDRAULIC PILOT LINES
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
PLT-TP-04	6	1/4	-4	10,4	0,41	13,5	1930	54	7720	30	1,18	0,14	10
PLT-TP-06	10	3/8	-6	14,9	0,59	10,5	1500	42	6000	50	1,97	0,21	14

806AA
FLEXOR 6
SAE 100 R6 - EN 854 R6



Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	ONE HIGH TENSILE TEXTILE BRAID
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	LOW PRESSURE HIDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER. SPECIALLY DESIGNED FOR USE IN "PUSH ON" APPLICATIONS
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA FLEXOR 6 ID... - WP ... MPa (... PSI) - SAE 100R6-EN854 R6 -DN ... - Q/yr
Note	* Alfagomma proprietary hose Not listed in SAE J517 100 R6 spec. S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
806AA006008JA8	6	1/4	-4	12,7	0,5	2,8	400	11	1600	64	2,6	0,13	9
806AA008008JA8	8	5/16	-5	14,3	0,56	2,8	400	11	1600	76	3	0,13	9
806AA010008JA8	10	3/8	-6	15,9	0,63	2,8	400	11	1600	76	3	0,17	11
806AA012008JA8	13	1/2	-8	19,8	0,78	2,8	400	11	1600	102	4,1	0,23	15
806AA016008JA8	16	5/8	-10	23	0,91	2,4	350	10	1400	107	4,3	0,27	18
806AA020008JA8	19	3/4	-12	26,9	1,06	2,1	300	8	1200	152	6,1	0,37	25
806AA025008JA8*	25	1	-16	33,4	1,31	1,7	250	7	1000	203	8,1	0,49	33

TEXTILE BRAID**860AA****FLEXOR 2TE****EN 854 2TE**

Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	ONE HIGH TENSILE TEXTILE BRAID
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	MEDIUM PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA FLEXOR 2TE ID... - WP ... MPa (... PSI) - EN854 2TE-DN... - Q/yr
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
860AA00600HTA8	6	1/4	-4	13,4	0,53	7,5	1100	30	4400	40	1,6	0,14	9
860AA00800HTA8	8	5/16	-5	14,9	0,59	6,8	986	27	3945	50	2	0,15	10
860AA01000HTA8	10	3/8	-6	16,5	0,65	6,3	914	25	3655	60	2,4	0,19	13
860AA01200HTA8	13	1/2	-8	19,7	0,78	5,8	840	23	3365	70	2,8	0,24	16
860AA01600HTA8	16	5/8	-10	23,9	0,94	5	730	20	2920	90	3,6	0,29	19
860AA02000HTA8	19	3/4	-12	27	1,06	4,5	650	18	2600	110	4,4	0,41	27
860AA02500HTA8	25	1	-16	34,4	1,35	4	580	16	2320	150	6	0,6	40

865AA
FLEXOR 3TE
EN 854 3TE



Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	Two high tensile textile braids and two tensile steel braids
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	MEDIUM PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA FLEXOR 3TE ID... - WP ... MPa (... PSI) - EN 854 3TE - DN ... - Q/yr
Note	S.F.: 4:1

Code	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
	mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
865AA00600HUA8	6	1/4	-4	14,4	0,57	14,5	2100	58	8400	45	1,8	0,16	11
865AA00800HUA8	8	5/16	-5	16,9	0,67	13	1900	52	7600	55	2,2	0,2	13
865AA01000HUA8	10	3/8	-6	18,5	0,73	11	1600	44	6400	70	2,8	0,24	16
865AA01200HUA8	13	1/2	-8	21,7	0,85	9,3	1350	37	5400	85	3,4	0,3	20
865AA01600HUA8	16	5/8	-10	25,9	1,02	8	1150	32	4600	105	4,2	0,41	27
865AA02000HUA8	19	3/4	-12	29	1,14	7	1000	28	4000	130	5,2	0,49	33
865AA02500HUA8	25	1	-16	35,9	1,41	5,5	800	22	3200	150	6	0,65	44

TEXTILE BRAID**870AA****FLEXOR 3****SAE 100 R3 - EN 854 R3**

Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	Two high tensile textile braids and two tensile steel braids
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	MEDIUM PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA FLEXOR 3 ID... - WP ... MPa (... PSI) - SAE 100R3- EN854 R3-DN ... - Q/yr
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
870AA00600YXA8	6	1/4	-4	14,3	0,56	8,6	1250	35	5000	76	3	0,18	12
870AA00800YXA8	8	5/16	-5	17,5	0,69	8,3	1200	33	4800	102	4,1	0,24	16
870AA01000YXA8	10	3/8	-6	19,1	0,75	7,8	1125	31	4500	102	4,1	0,25	17
870AA01200YXA8	13	1/2	-8	23,8	0,94	7	1000	28	4000	127	5,1	0,38	25
870AA01600YXA8	16	5/8	-10	27	1,06	6	875	24	3500	140	5,6	0,46	31
870AA02000YXA8	19	3/4	-12	31,8	1,25	5,2	750	21	3000	152	6,1	0,63	42
870AA02500YXA8	25	1	-16	38,1	1,5	3,9	565	16	2260	203	8,1	0,76	51
870AA03245YXA8	32	1.1/4	-20	45	1,77	2,6	377	10	1508	254	10,2	0,94	63

805AA
FLEXOR 5
SAE 100 R5



Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	ONE HIGH TENSILE STEEL BRAID (1B)
Cover	BRAIDED HIGH TENSILE TEXTILE CORDS
Application	MEDIUM PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA - FLEXOR 5 - ... ID ... - WP MPa (... PSI) - SAE 100 R5/J1402DOT All FM VSS... - Q/yr
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
805AA005008CA8	5	3/16	-4	13,2	0,52	20,7	3000	83	12000	76	3	0,23	15
805AA006008CA8	6	1/4	-5	14,8	0,58	20,7	3000	83	12000	86	3,4	0,27	18
805AA008008CA8	8	5/16	-6	17,3	0,68	15,5	2250	62	9000	102	4,1	0,34	23
805AA011008CA8	10	13/32	-8	19,5	0,77	13,8	2000	55	8000	117	4,7	0,45	30
805AA012008CA8	13	1/2	-10	23,4	0,92	12,1	1750	48	7000	140	5,6	0,56	37
805AA016008CA8	16	5/8	-12	27,4	1,08	10,3	1500	41	6000	165	6,6	0,67	45
805AA022008CA8	22	7/8	-16	31,4	1,24	5,5	800	22	3200	187	7,5	0,69	46
805AA028008CA8	29	1.1/8	-20	38,1	1,5	4,3	625	17	2500	229	9,2	0,84	57
805AA035008CA8	35	1.3/8	-24	44,5	1,75	3,4	500	14	2000	267	10,7	1,06	71
805AA045008CA8	46	1.13/16	-32	56,4	2,22	2,4	350	10	1400	337	13,5	1,35	90

WIRE BRAID

8N6AA

FLEXOPAK 2SC

SAE 100 R16 - EN 857 2SC



Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	TWO HIGH TENSILE STEEL BRAIDS (2B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA FLEXOPAK 2SC ID ... WP ... MPa (... PSI) - EN857 2SC -DN ... - Q/yr
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8N6AA00600SPB8	6	1/4	-4	13,2	0,52	40	5800	160	23200	50	2	0,27	18
8N6AA00800SPB8	8	5/16	-5	14,5	0,57	35	5000	140	20000	55	2,3	0,31	21
8N6AA01000SPB8	10	3/8	-6	17	0,67	33	4800	132	19200	65	2,6	0,36	24
8N6AA01200SPB8	13	1/2	-8	20,3	0,8	27,5	4000	110	16000	90	3,6	0,47	31
8N6AA01600SPB8	16	5/8	-10	23,9	0,94	25	3630	100	14520	100	4	0,57	38
8N6AA02000SPB8	19	3/4	-12	27,7	1,09	21,5	3120	86	12480	120	4,8	0,76	51
8N6AA02500SPB8	25	1	-16	34,6	1,36	16,5	2400	66	9600	150	6,1	1,13	76

835AA
FLEXOR 1SN - R1AT
EN 853 1SN (up to 2") - SAE 100 R1AT


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	ONE HIGH TENSILE STEEL BRAID (1B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m max over 1"
Branding	ALFAGOMMA FLEXOR 1AT/1SN ID... - WP ... MPa (... PSI) - SAE 100 R1AT - EN 853 1SN - DN ... - Q/yr
Note	MSHA cover available: Code 836AA S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
835AA00500HAA8	5	3/16	-3	11,8	0,46	25	3630	100	14520	90	3,6	0,18	12
835AA00600HAA8	6	1/4	-4	13,4	0,53	22,5	3270	90	13080	100	4	0,22	15
835AA00800HAA8	8	5/16	-5	15	0,59	21,5	3120	86	12480	115	4,6	0,26	17
835AA01000HAA8	10	3/8	-6	17,4	0,69	18	2610	72	10460	130	5,2	0,33	22
835AA01200HAA8	13	1/2	-8	20,6	0,81	16	2320	64	9280	180	7,2	0,42	28
835AA01600HAA8	16	5/8	-10	23,7	0,93	13	1890	52	7560	200	8	0,51	34
835AA02000HAA8	19	3/4	-12	27,7	1,09	10,5	1530	42	6120	240	9,6	0,62	42
835AA02500HAA8	25	1	-16	35,6	1,4	8,8	1280	35	5120	300	12	0,92	62
835AA0324411A8	32	1.1/4	-20	43,5	1,71	6,3	920	25	3680	420	16,8	1,2	80
835AA0385111A8	38	1.1/2	-24	50,6	1,99	5	730	20	2920	500	20	1,48	99
835AA0516411A8	51	2	-32	64	2,52	4	580	16	2320	630	25,2	2	134
815AA063791RA8	64	2.1/2	-40	79	3,11	5	720	20	2880	760	30,4	2,89	194
815AA076921RA8	76	3	-48	92	3,62	3,5	500	14	2000	900	36	3,43	230

WIRE BRAID

840AA

FLEXOR 2ST - R2A

EN 853 2ST (up to 2") - SAE 100 R2A



Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	TWO HIGH TENSILE STEEL BRAIDS (2B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m max over 1"
Branding	ALFAGOMMA FLEXOR 2A/2ST ID... - WP ... MPa (... PSI) - SAE 100 R2A - EN 853 2ST - DN ... - Q/yr
Note	MSHA cover available: Code 841AA S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
840AA00600HAA8	6	1/4	-4	17,5	0,69	40	5714	160	23200	100	4	0,42	28
840AA00800HAA8	8	5/16	-5	19,1	0,75	35	5000	140	20000	115	4,6	0,5	34
840AA01000HAA8	10	3/8	-6	21,4	0,84	33	4714	132	19200	130	5,2	0,6	40
840AA01200HAA8	13	1/2	-8	24,6	0,97	27,5	3929	110	16000	180	7,2	0,74	50
840AA01600HAA8	16	5/8	-10	27,8	1,09	25	3571	100	14520	200	8	0,86	58
840AA02000HAA8	19	3/4	-12	31,8	1,25	21,5	3071	86	12480	240	9,6	1,05	70
840AA02500HAA8	25	1	-16	39,7	1,56	16,5	2357	66	9600	300	12	1,41	94
840AA0325121A8	32	1.1/4	-20	50,8	2	12,5	1786	50	7280	420	16,8	2,14	143
840AA0385721A8	38	1.1/2	-24	57,2	2,25	9	1286	36	5240	500	20	2,55	171
840AA0517021A8	51	2	-32	69,8	2,75	8	1143	32	4640	630	25,2	3,34	224

845AA
FLEXOR 2SN - R2AT
EN 853 2SN - SAE 100 R2AT


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	TWO HIGH TENSILE STEEL BRAIDS (2B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 mt. max over 1"
Branding	ALFAGOMMA FLEXOR 2AT/2SN ID... - WP ... MPa (... PSI) - SAE 100 R2AT - EN 853 2SN - DN ... - Q/yr
Note	MSHA cover available: Code 846AA S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
845AA00500HAA8	5	3/16	-3	13,4	0,53	42	6000	168	24000	90	3,6	0,29	19
845AA00600HAA8	6	1/4	-4	15	0,59	40	5800	160	23200	100	4	0,36	24
845AA00800HAA8	8	5/16	-5	16,7	0,66	35	5000	140	20000	115	4,6	0,42	28
845AA01000HAA8	10	3/8	-6	19,1	0,75	33	4800	132	19200	125	5	0,51	34
845AA01200HAA8	13	1/2	-8	22,2	0,87	27,5	4000	110	16000	175	7	0,64	43
845AA01600HAA8	16	5/8	-10	25,4	1	25	3630	100	14520	200	8	0,74	50
845AA02000HAA8	19	3/4	-12	29,3	1,15	21,5	3120	86	12480	240	9,6	0,91	61
845AA02500HAA8	25	1	-16	38,1	1,5	16,5	2400	66	9600	300	12	1,32	88
845AA0324831A8	32	1.1/4	-20	48,3	1,9	12,5	1820	50	7280	420	16,8	1,93	129
845AA0385531A8	38	1.1/2	-24	54,6	2,15	9	1310	36	5240	500	20	2,41	161
845AA0516731A8	51	2	-32	67,4	2,65	8	1160	32	4640	630	25,2	2,96	198
825AA063832RA8	64	2.1/2	-40	83	3,27	7	1000	28	4000	760	30,4	3,96	265
825AA076962RA8	76	3	-48	96	3,78	5,5	800	22	3200	900	36	4,96	332

WIRE BRAID
8C7AA
FLEXOPAK 1SC
EN 857 1SC


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	ONE HIGH TENSILE STEEL BRAID (1B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA FLEXOR 1SC ID ... WP ... MPa (... PSI) - EN 857 1SC DN ... - Q/yr
Note	S.F.: 4:1

Code	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
	mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
833AA00600I7B8	6	1/4	-4	12,1	0,48	22,5	3250	90	13000	50	2	0,17	11
833AA00800I7B8	8	5/16	-5	14,1	0,56	21,5	3100	86	12400	55	2,2	0,19	13
833AA01000I7B8	10	3/8	-6	15,6	0,61	21	3000	84	12000	65	2,6	0,26	17
8C7AA01200IJA8	13	1/2	-8	19,5	0,77	16	2286	64	9143	90	3,6	0,41	27
8C7AA01600IJA8	16	5/8	-10	23	0,91	13	1890	52	7560	100	4	0,44	29
8C7AA02000IJA8	19	3/4	-12	26,7	1,05	10,5	1530	42	6120	125	5	0,57	38
8C7AA02500IJA8	25	1	-16	34,9	1,37	8,8	1280	35	5120	150	6	0,74	50

8D2AA
FLEXOPAK 3
ALFAGOMMA PROPRIETARY HOSE


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	THREE HIGH TENSILE STEEL BRAIDS (3B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA FLEXOPAK 3 I.D. ..." - W.P. ... MPa / ... PSI - Q/yr
Note	S.F.: 4:1

Code	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
	mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
8D2AA01200HFB8	13	1/2	-8	24,8	0,98	46,9	6800	188	27200	160	6,4	0,95	64
8D2AA02000HFB8	19	3/4	-12	32,1	1,26	35,2	5100	141	20400	260	10,4	1,38	92
8D2AA02500HFB8	25	1	-16	39,8	1,57	29	4200	116	16800	330	13,2	1,96	131

WIRE BRAID**8D8AA****FLEXOPAK PLT****ALFAGOMMA PROPRIETARY HOSE**

Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	ONE HIGH TENSILE STEEL BRAID (1B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	MEDIUM PRESSURE HYDRAULIC LINES,FUEL OIL,ANTIFREEZE SOLUTIONS,AIR AND WATER. SPECIALLY DESIGNED FOR HYDRAULIC PILOT LINES
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA FLEXOPAK PLT ID... - WP ... MPa (... PSI) - Q/yr
Note	S.F.: 4:1

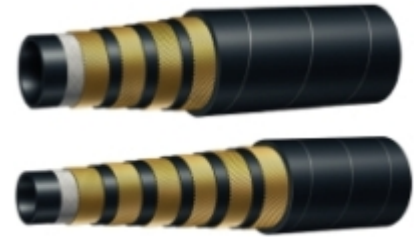
Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8D8AA00500DKB8	5	3/16	-3	9,6	0,38	12	1750	48	7000	20	0,8	0,1	7
8D8AA00600DKB8	6	1/4	-4	11,4	0,45	12	1750	48	7000	30	1,2	0,14	10
8D8AA00800DKB8	8	5/16	-5	13	0,51	12	1750	48	7000	40	1,6	0,17	12
8D8AA01000DKB8	10	3/8	-6	14,7	0,58	12	1750	48	7000	60	2,4	0,21	14
8D8AA01200DKB8	13	1/2	-8	17,4	0,69	12	1750	48	7000	80	3,2	0,23	15

8I3AA
FLEXOPAK 16
SAE 100 R16



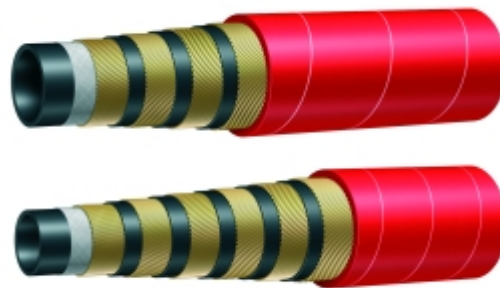
Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	TWO HIGH TENSILE STEEL BRAIDS (2B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA FLEXOPAK 16 ID ... WP ... MPa (... PSI) - DN ... - Q/yr
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8I3AA00600UPB8	6	1/4	-4	13,2	0,52	34,5	5000	138	20000	51	2	0,25	17
8I3AA00800UPB8	8	5/16	-5	14,5	0,57	29,3	4240	117	16960	57	2,3	0,3	20
8I3AA01000UPB8	10	3/8	-6	17	0,67	27,6	4000	110	16000	64	2,6	0,36	24
8I3AA01200UPB8	13	1/2	-8	20,3	0,8	24,1	3500	97	14000	90	3,6	0,46	31
8I3AA01600UPB8	16	5/8	-10	23,9	0,94	19	2750	76	11000	101	4	0,54	36
8I3AA02000UPB8	19	3/4	-12	27,7	1,09	15,5	2250	62	9000	121	4,8	0,74	50
8I3AA02500UPB8	25	1	-16	34,6	1,36	13,8	2000	55	8000	152	6,1	1	67
8I3AA03200UPB8	32	1.1/4	-20	42,4	1,67	11,2	1620	45	6480	209,5	8,4	1,31	88

WIRE SPIRAL**809AA****FLEXOR 13 MSHA****SAE 100 R13 - EN 856 R13**

Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	FOUR/SIX HIGH TENSILE STEEL SPIRALS (4S/ 6S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +121°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m max over 1"
Branding	ALFAGOMMA FLEXOR 13 DN ... - ID ... - WP ... BAR - ... PSI - USMSHA IC-152/8 - MADE IN ITALY - Q/yr
Note	S.F.: 4:1

Code	Constr.	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
809AA02000ARB8	4S	19	3/4	-12	32,1	1,26	35	5000	140	20000	241	9,6	1,6	107
809AA02500ARB8	4S	25	1	-16	38,7	1,52	38	5500	152	22000	305	12,2	2	134
809AA03200ARB8	6S	32	1.1/4	-20	49,8	1,96	35	5000	140	20000	419	16,8	3,6	241
809AA03800ARB8	6S	38	1.1/2	-24	57,3	2,26	35	5000	140	20000	508	20,3	4,8	322
809AA05100ARB8	6S	51	2	-32	70,9	2,79	35	5000	140	20000	635	25,4	6,6	442

809AH
FLEXOR 13R MSHA - RED COVER
SAE 100 R13 - EN 856 R13


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	FOUR/SIX HIGH TENSILE STEEL SPIRALS (4S/ 6S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +121°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m max over 1"
Branding	ALFAGOMMA FLEXOR 13 DN ... - ID ... - WP ... BAR- PSI - USMHA IC-152/3 - MADE IN ITALY - Q/yr
Note	S.F.: 4:1

Code	Constr.	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
		mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
809AH02000ASB8	4S	19	3/4	-12	32,1	1,26	35	5000	140	20000	241	9,6	1,63	109
809AH02500ASB8	4S	25	1	-16	38,7	1,52	38	5500	152	22000	305	12,2	2,04	137
809AH03200ASB8	6S	32	1.1/4	-20	49,8	1,96	35	5000	140	20000	419	16,8	3,64	244
809AH03800ASB8	6S	38	1.1/2	-24	57,3	2,26	35	5000	140	20000	508	20,3	4,89	328
809AH05100ASB8	6S	51	2	-32	70,9	2,79	35	5000	140	20000	635	25,4	6,62	444

WIRE SPIRAL

850AA

FLEXOR 4SP MSHA

EN 856 4SP



Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	FOUR HIGH TENSILE STEEL SPIRALS (4S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +100°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA FLEXOR 4SP/R9R -ID... WP ...MPa -(...PSI) - EN 856 4SP - DN... USMSHA IC-152/8 ... - Q/yr

Note

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
850AA00600PEB8	6	1/4	-4	17,9	0,7	45	6550	180	26200	150	6	0,58	39
850AA01000PEB8	10	3/8	-6	21,4	0,84	44,5	6450	178	25800	180	7,2	0,74	50
850AA01200PEB8	13	1/2	-8	24,6	0,97	41,5	6000	166	24000	230	9,2	0,88	59
850AA01600PEB8	16	5/8	-10	28,2	1,11	35	5000	140	20000	250	10	1,05	71
850AA02000PEB8	19	3/4	-12	32,2	1,27	38	5510	152	22040	300	12	1,44	96
850AA02500PEB8	25	1	-16	39,7	1,56	32	4640	128	18560	340	13,6	1,96	131

855AA
FLEXOR 4SH MSHA
EN 856 4SH



Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	FOUR HIGH TENSILE STEEL SPIRALS (4S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +100°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m max over 1"
Branding	ALFAGOMMA FLEXOR 4SH ID... - WP ... MPa (... PSI) - EN 856 4SH DN... - USMSHA IC-152/8 - ... - Q/yr
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
855AA02000RFB8	19	3/4	-12	32,2	1,27	42	6000	168	24000	280	11,2	1,57	106
855AA02500RFB8	25	1	-16	38,7	1,52	38	5500	152	22000	340	13,6	1,95	131
855AA03200RFB8	32	1.1/4	-20	45,5	1,79	35	5000	140	20000	460	18,4	2,47	165
855AA03800RFB8	38	1.1/2	-24	53,5	2,11	29	4200	116	16800	560	22,4	3,27	219
855AA05100RFB8	51	2	-32	68,1	2,68	25	3650	100	14600	700	28	4,67	313

WIRE SPIRAL

898AA

FLEXOR 12 MSHA

SAE 100 R12 - EN 856 R12



Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	FOUR HIGH TENSILE STEEL SPIRALS (4S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +121°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m max over 1"
Branding	ALFAGOMMA FLEXOR 12 ID... - WP ...MPa (... PSI) - SAE 100 R12-EN 856 R12 -DN.... -USMSHA.... - Q/yr
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
898AA01000RTB8	10	3/8	-6	20,3	0,8	28	4000	112	16000	127	5,1	0,61	41
898AA01200RTB8	13	1/2	-8	23,8	0,94	28	4000	112	16000	178	7,1	0,76	51
898AA01600RTB8	16	5/8	-10	27,4	1,08	28	4000	112	16000	203	8,1	1,02	68
898AA02000RTB8	19	3/4	-12	30,7	1,21	28	4000	112	16000	241	9,6	1,19	80
898AA02500RTB8	25	1	-16	38	1,5	28	4000	112	16000	305	12,2	1,76	118
898AA03200RTB8	32	1.1/4	-20	47	1,85	21	3000	84	12000	419	16,8	2,69	180
898AA03800RTB8	38	1.1/2	-24	53,5	2,11	17,5	2500	70	10000	508	20,3	3,08	206
898AA05100RTB8	51	2	-32	66,7	2,63	17,5	2500	70	10000	635	25,4	3,97	266
898AA06300RTB8	64	2.1/2	-40	81,2	3,2	14	2030	56	8120	720	28,8	6,36	426

898AB
FLEXOR 12G MSHA - GREY COVER
SAE 100 R12 - EN 856 R12


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	FOUR HIGH TENSILE STEEL SPIRALS (4S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +121°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m max over 1"
Branding	ALFAGOMMA FLEXOR 12 ID...-WP ... MPa (... PSI) -SAE 100 R12-EN 856 R12 -DN...-USMSHA IC-152/2 - Q/yr
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
898AB01000RSB8	10	3/8	-6	20,3	0,8	28	4000	112	16000	127	5,1	0,65	44
898AB01200RSB8	13	1/2	-8	23,8	0,94	28	4000	112	16000	178	7,1	0,81	54
898AB01600RSB8	16	5/8	-10	27,4	1,08	28	4000	112	16000	203	8,1	1,08	72
898AB02000RSB8	19	3/4	-12	30,7	1,21	28	4000	112	16000	241	9,6	1,27	85
898AB02500RSB8	25	1	-16	38	1,5	28	4000	112	16000	305	12,2	1,79	120
898AB03200RSB8	32	1.1/4	-20	47	1,85	21	3000	84	12000	419	16,8	2,74	184
898AB03800RSB8	38	1.1/2	-24	53,5	2,11	17,5	2500	70	10000	508	20,3	3,14	210
898AB05100RSB8	51	2	-32	66,7	2,63	17,5	2500	70	10000	635	25,4	4,04	271

ALFATECH - PRESSURE RATED RANGE**833AA****AT3K****SAE 100 R17 - EN 857 1SC (up to 3/8")**

Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	ONE/TWO HIGH TENSILE STEEL BRAIDS, FOUR HIGH TENSILE STEEL SPIRALS (1B/ 2B, 4S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA ALFATECH 3000 ID... - WP ... MPa- (... PSI) - SAE 100 R17 - DN ... - Q/yr
Note	SPECIFICATION REFERENCE SAE 100 R17 EN 857 1SC (1/4, 5/6, 3/8) EN 857 2SC (3/4, 1) SAE 100 R12 (1.1/4)

Code	Constr.	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
		mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
833AA00500I7B8	1B	5	3/16	-3	10,5	0,41	21	3000	84	12000	40	1,6	0,15	10
833AA00600I7B8	1B	6	1/4	-4	12,1	0,48	22,5	3250	90	13000	50	2	0,17	11
833AA00800I7B8	1B	8	5/16	-5	14,1	0,56	21,5	3100	86	12400	55	2,2	0,19	13
833AA01000I7B8	1B	10	3/8	-6	15,6	0,61	21	3000	84	12000	65	2,6	0,26	17
833AA01200I7B8	1B	13	1/2	-8	19,5	0,77	21	3000	84	12000	90	3,6	0,36	24
833AA01600I7B8	2B	16	5/8	-10	23,7	0,93	21	3000	84	12000	105	4,2	0,61	41
822AA02000I8B8	2B	19	3/4	-12	27,7	1,09	24	3500	96	14000	125	5	0,79	53
822AA02500I8B8	2B	25	1	-16	35,6	1,4	21	3000	84	12000	150	6	1,23	82
898AA03200RTB8	4S	32	1.1/4	-20	47	1,85	21	3000	84	12000	419	16,8	2,69	180

ALFATECH - PRESSURE RATED RANGE

894AA
AT4K
ALFAGOMMA PROPRIETARY HOSE


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	TWO HIGH TENSILE STEEL BRAIDS, FOUR HIGH TENSILE STEEL SPIRALS (2B, 4S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +100°C for braided hose; -40°C +121°C° for spiral hose
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m max over 1"
Branding	ALFAGOMMA ALFATECH 4000 ID... WP ... MPa - (... PSI) - DN ... MADE IN ITALY - Q/yr
Note	SPECIFICATION REFERENCE SAE 100 R16 (5/16, 3/8) EN 857 2SC (1/2, 5/8) SAE 100 R12 (3/8, 1/2, 5/8, 3/4, 1) EN 456 4SP (1.1/4) EN 456 4SH (1.1/2, 2)

Code	Constr.	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
		mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
813AA00800UPB8	2B	8	5/16	-5	14,5	0,57	29,3	4240	117	16960	57	2,3	0,3	20
813AA01000UPB8	2B	10	3/8	-6	17	0,67	28	4000	112	16000	64	2,6	0,36	24
822AA01200I8B8	2B	13	1/2	-8	20,6	0,81	31	4500	124	18000	90	3,6	0,52	35
822AA01600I8B8	2B	16	5/8	-10	23,7	0,93	28	4000	112	16000	101	4	0,6	40
804AA02000VTA8	2B	19	3/4	-12	29,3	1,15	28	4000	112	16000	130	5,2	0,98	66
898AA01000RTB8	4S	10	3/8	-6	20,3	0,8	28	4000	112	16000	64	2,6	0,61	41
898AA01200RTB8	4S	13	1/2	-8	23,8	0,94	28	4000	112	16000	90	3,6	0,82	55
898AA01600RTB8	4S	16	5/8	-10	27,4	1,08	28	4000	112	16000	100	4	1,1	74
898AA02000RTB8	4S	19	3/4	-12	30,7	1,21	28	4000	112	16000	130	5,2	1,23	82
898AA02500RTB8	4S	25	1	-16	38	1,5	28	4000	112	16000	150	6	1,8	121
894AA03200ASA8	4S	32	1.1/4	-20	47,5	1,87	28	4000	112	16000	230	9,2	2,47	165
855AA03800RFB8	4S	38	1.1/2	-24	53,5	2,11	29	4000	116	16800	560	22,4	3,27	219
894AA05100ASA8	4S	51	2	-32	68,1	2,68	28	4000	112	16000	590	23,6	4,67	313

ALFATECH - PRESSURE RATED RANGE

896AA

AT5K

ALFAGOMMA PROPRIETARY HOSE

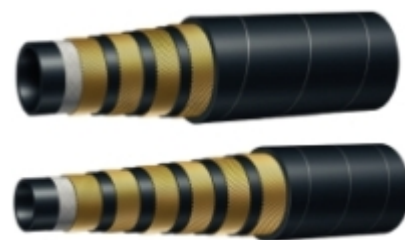


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	TWO HIGH TENSILE STEEL BRAIDS, FOUR/SIX HIGH TENSILE STEEL SPIRALS (2B, 4S/ 6S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +100°C for braided hose; -40°C +121°C° for spiral hose
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 mt. max over 1"
Branding	ALFAGOMMA ALFATECH 5000 ID... WP ... MPa (... PSI) - DN ... - MADE IN ITALY- Q/yr
Note	SPECIFICATION REFERENCE SAE 100 R16 (1/4) EN 857 2SC (5/16, 3/8) EN 456 4SP (5/8, 3/4) EN 456 4SH (1, 1.1/4) SAE 100 R13 (1.1/4, 1.1/2, 2)

Code	Constr.	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
813AA00600UPB8	2B	6	1/4	-4	13,2	0,52	35	5000	140	20000	51	2	0,25	17
822AA00800I8B8	2B	8	5/16	-5	15	0,59	37,5	5500	150	22000	57	2,3	0,3	20
822AA01000I8B8	2B	10	3/8	-6	17,4	0,69	35	5000	140	20000	64	2,6	0,4	27
804AA01200VTA8	2B	13	1/2	-8	22,2	0,87	35	5000	140	20000	80	3,2	0,67	45
804AA01600VTA8	2B	16	5/8	-10	25,4	1	35	5000	140	20000	100	4	0,8	53
850AA01600PEB8	4S	16	5/8	-10	28,2	1,11	35	5000	140	20000	125	5	1,05	70
850AA02000PEB8	4S	19	3/4	-12	32,2	1,27	38	5510	152	22040	140	5,6	1,49	100
855AA02500RFB8	4S	25	1	-16	38,7	1,52	38	5510	152	22040	190	7,6	1,94	130
855AA03200RFB8	4S	32	1.1/4	-20	45,5	1,79	35	5000	140	20000	240	9,6	2,47	165
8A3AA03800ATA8	4S	38	1.1/2	-24	53,5	2,11	35	5000	140	20000	475	19	3,37	226
809AA03200ARB8	6S	32	1.1/4	-20	49,8	1,96	35	5000	140	20000	210	8,4	3,59	241
809AA03800ARB8	6S	38	1.1/2	-24	57,3	2,26	35	5000	140	20000	475	19	4,83	324
809AA05100ARB8	6S	51	2	-32	71,1	2,8	35	5000	140	20000	545	21,8	6,54	438
896AA06300ATA8	6S	63	2.1/2	-40	83,8	3,3	35	5000	140	20000	895	35,2	8,77	588

ALFATECH - PRESSURE RATED RANGE

897AA
AT6K
SAE 100 R15



Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	FOUR/SIX HIGH TENSILE STEEL SPIRALS (4S/ 6S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +121°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	40 m max
Branding	ALFAGOMMA ALFATECH 6000 ID... WP ...MPa - (... PSI) - SAE 100 R15 DN... USMSHA IC-152/8 - ... - Q/yr
Note	SPECIFICATION REFERENCE SAE 100 R15 EN 456 4SP (1/4, 3/8, 1/2) EN 456 4SH (3/4)

Code	Constr.	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
850AA00600PEB8	4S	6	1/4	-4	17,9	0,7	45	6550	180	26200	150	6	0,58	39
850AA01000PEB8	4S	10	3/8	-6	21,4	0,84	44,5	6450	178	25800	180	7,2	0,74	50
850AA01200PEB8	4S	13	1/2	-8	24,6	0,97	42	6000	166	24000	230	9,2	0,88	59
897AA01600AUA8	4S	16	5/8	-10	28,6	1,13	42	6000	168	24000	250	10	1,32	88
855AA02000RFB8	4S	19	3/4	-12	32,2	1,27	42	6000	168	24000	267	10,7	1,62	109
897AA02500AUA8	4S	25	1	-16	38,7	1,52	42	6000	168	24000	280	11,2	2,2	147
897AA03200AUA8	6S	32	1.1/4	-20	49,8	1,96	42	6000	168	24000	280	11,2	3,59	241
897AA03800AUA8	6S	38	1.1/2	-24	57,3	2,26	42	6000	168	24000	315	12,6	5	335
897AA05100AUA8	6S	51	2	-32	72	2,83	42	6000	168	24000	600	24	7,08	474

ALFATECH - PRESSURE RATED RANGE

8D4AA

AT7K

ALFAGOMMA PROPRIETARY HOSE



Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	FOUR HIGH TENSILE STEEL SPIRALS (4S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +121°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFATECH 7000 ID... WP ... MPa - (... PSI) - DN ... USMSHA IC-152/8 - Q/yr
Note	S.F.: 4:1

Code	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
	mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
8D4AA01600AJA8	16	5/8	-10	28,6	1,13	49	7000	196	28000	250	10	1,32	88

ALFATECH - PRESSURE RATED RANGE

8E9AA
AT8K
ALFAGOMMA PROPRIETARY HOSE


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	SIX HIGH TENSILE STEEL SPIRALS (6S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +121°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m over 1"
Branding	ALFATECH 8000 I.D. ... W.P. ... MPa - B.P. ... MPa - MSHA IC 152/8 - Q/yr
Note	S.F.: 4:1

Code	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
	mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
8E9AA02000RYA8	19	3/4	-12	34,4	1,35	56	8000	224	32000	270	10,8	2,28	153
8E9AA02500RYA8	25	1	-16	42,1	1,66	56	8000	224	32000	300	12	3,22	216

MINETUFF -MSHA- ABRASION RES.**8M8AA****AT3K MINETUFF - MSHA****SAE 100 R17 - EN 857 1SC (up to 3/8")**

Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	ONE/TWO HIGH TENSILE STEEL BRAIDS (1B/ 2B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER. SPECIAL "MINETUFF COVER" FOR LONG LASTING LIFE IN HEAVY DUTY HIGH ABRASION APPLICATIONS.
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA ALFATECH 3000 MINETUFF ID... - WP ... MPa - (... PSI) - SAE 100 R17 - DN ... - Q/yr
Note	SPECIFICATION REFERENCE SAE 100 R17 EN 857 1SC (1/4, 5/6, 3/8) EN 857 2SC (3/4, 1)

Code	Constr.	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
		mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
8M8AA00600SAB8	1B	6	1/4	-4	12,1	0,48	22,5	3250	90	13000	50	2	0,17	11
8M8AA00800SAB8	1B	8	5/16	-5	14,1	0,56	21,5	3100	86	12400	55	2,2	0,2	13
8M8AA01000SAB8	1B	10	3/8	-6	15,6	0,61	21	3000	84	12000	65	2,6	0,26	17
8M8AA01200SAB8	1B	13	1/2	-8	19,5	0,77	21	3000	84	12000	90	3,6	0,36	24
8M8AA01600SAB8	2B	16	5/8	-10			21	3000	84	12000	105	4,2	0,6	41
8M8AA02000SAB8	2B	19	3/4	-12	27,7	1,09	24	3500	96	14000	125	5	0,79	53
8M8AA02500SAB8	2B	25	1	-16	35,6	1,4	21	3000	84	12000	150	6	1,24	83

MINETUFF -MSHA- ABRASION RES.
8N1AA
AT4K MINETUFF - MSHA
ALFAGOMMA PROPRIETARY HOSE

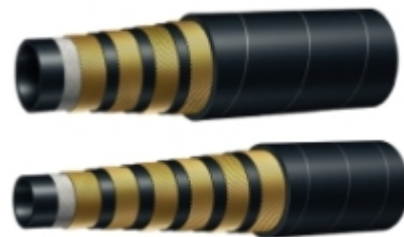

Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	TWO HIGH TENSILE STEEL BRAIDS, FOUR HIGH TENSILE STEEL SPIRALS (2B, 4S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER. SPECIAL "MINETUFF COVER" FOR LONG LASTING LIFE IN HEAVY DUTY HIGH ABRASION APPLICATIONS.
Constant operation	-40°C +100°C for braided hose; -40°C +121°C° for spiral hose
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m max over 1"
Branding	ALFAGOMMA AT4K MINETUFF ID... - WP ... MPa - (... PSI) - DN... - Q/yr - MSHA IC
Note	SPECIFICATION REFERENCE SAE 100 R16 (5/16, 3/8) EN 857 2SC (1/2, 5/8) SAE 100 R12 (3/4, 1) EN 456 4SP (1.1/4) EN 456 4SH (1.1/2, 2)

Code	Constr.	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8N1AA00800SEB8	2B	8	5/16	-5	14,5	0,57	29,3	4240	117	16960	57	2,3	0,3	20
8N1AA01000SEB8	2B	10	3/8	-6	17	0,67	28	4000	112	16000	64	2,6	0,35	24
8N1AA01200SEB8	2B	13	1/2	-8	20,6	0,81	31	4500	124	18000	90	3,6	0,52	35
8N1AA01600SEB8	2B	16	5/8	-10	23,7	0,93	28	4000	112	16000	101	4	0,6	41
8N1AA02000R6B8	4S	19	3/4	-12	30,7	1,21	28	4000	112	16000	130	5,2	1,2	80
8N1AA02500R6B8	4S	25	1	-16	38	1,5	28	4000	112	16000	150	6	1,77	119
8N1AA03200R6B8	4S	32	1.1/4	-20	47,5	1,87	28	4000	112	16000	230	9,2	2,65	178
8N1AA03800R6B8	4S	38	1.1/2	-24	53,5	2,11	29	4200	116	16800	450	18	3,29	221
8N1AA05100R6B8	4S	51	2	-32	68,1	2,68	28	4000	112	16000	590	23,6	4,71	315

MINETUFF -MSHA- ABRASION RES.**8N2AA****AT5K MINETUFF - MSHA****ALFAGOMMA PROPRIETARY HOSE**

Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	TWO HIGH TENSILE STEEL BRAIDS, FOUR/SIX HIGH TENSILE STEEL SPIRALS (2B, 4S/ 6S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER. SPECIAL "MINETUFF COVER" FOR LONG LASTING LIFE IN HEAVY DUTY HIGH ABRASION APPLICATIONS.
Constant operation	-40°C +100°C for braided hose; -40°C +121°C° for spiral hose
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m max over 1"
Branding	ALFAGOMMA AT5K MINETUFF ID... - WP ... MPa - (... PSI) - SAE 100 R17 - DN... - Q/yr - MSHA IC
Note	SPECIFICATION REFERENCE SAE 100 R16 (1/4) EN 857 2SC (5/16, 3/8) EN 456 4SP (5/8, 3/4) EN 456 4SH (1, 1.1/4) SAE 100 R13 (1.1/2, 2)

Code	Constr.	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8N2AA00600SGB8	2B	6	1/4	-4	13,2	0,52	35	5000	140	20000	51	2	0,26	17
8N2AA00800SGB8	2B	8	5/16	-5	15	0,59	37,5	5500	150	22000	57	2,3	0,31	21
8N2AA01000SGB8	2B	10	3/8	-6	17,4	0,69	35	5000	140	20000	64	2,6	0,4	26
8N2AA01200SGB8	2B	13	1/2	-8	20,7	0,81	35	5000	140	20000	101	4	0,79	53
8N2AA01600R7A8	4S	16	5/8	-10	28,2	1,11	35	5000	140	20000	125	5	1,06	71
8N2AA02000R7A8	4S	19	3/4	-12	32,2	1,27	38	5510	152	22040	140	5,6	1,45	97
8N2AA02500R7A8	4S	25	1	-16	38,7	1,52	38	5510	152	22040	190	7,6	1,97	132
8N2AA03200R7A8	6S	32	1.1/4	-20	45,5	1,79	35	5000	140	20000	240	9,6	2,48	166
8N2AA03800R7A8	6S	38	1.1/2	-24	57,3	2,26	35	5000	140	20000	475	19	4,84	325
8N2AA05100R7A8	6S	51	2	-32	71,1	2,8	35	5000	140	20000	545	21,8	6,58	441

8N3AA
AT6K MINETUFF - MSHA
ALFAGOMMA PROPRIETARY HOSE


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	FOUR/SIX HIGH TENSILE STEEL SPIRALS (4S/ 6S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER. SPECIAL "MINETUFF COVER" FOR LONG LASTING LIFE IN HEAVY DUTY HIGH ABRASION APPLICATIONS.
Constant operation	-40°C +121°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m max over 1"
Branding	ALFAGOMMA AT6K MINETUFF ID... - WP ... MPa - (... PSI) - SAE 100 R17 - DN... - Q/yr - MSHA IC
Note	SPECIFICATION REFERENCE SAE 100 R15 EN 456 4SP (1/4, 3/8, 1/2) EN 456 4SH (3/4)

Code	Constr.	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
		mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
8N3AA00600R7B8	4S	6	1/4	-4	17,9	0,7	45	6550	180	26200	150	6	0,58	39
8N3AA01000R7B8	4S	10	3/8	-6	21,4	0,84	44,5	6450	178	25800	180	7,2	0,76	51
8N3AA01200R7B8	4S	13	1/2	-8	24,6	0,97	42	6000	168	24000	230	9,2	0,89	60
8N3AA01600R7B8	4S	16	5/8	-10	28,6	1,13	42	6000	168	24000	250	10	1,33	89
8N3AA02000R7B8	4S	19	3/4	-12	32,2	1,27	42	6000	168	24000	267	10,7	1,59	107
8N3AA02500R7B8	4S	25	1	-16	38,7	1,52	42	6000	168	24000	280	11,2	2,13	142
8N3AA03200R7B8	6S	32	1.1/4	-20	49,8	1,96	42	6000	168	24000	280	11,2	2,48	166
8N3AA03800R7B8	6S	38	1.1/2	-24	57,3	2,26	42	6000	168	24000	315	12,6	4,84	325

SUPERTUFF - MSHA - ABRASION RESISTANT**877AA****AT3K SUPERTUFF - MSHA****SAE 100 R17**

Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	ONE/TWO HIGH TENSILE STEEL BRAIDS (1B/ 2B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER. SPECIAL "SUPERTUFF COVER" FOR LONG LASTING LIFE IN HEAVY DUTY HIGH ABRASION APPLICATIONS
Constant operation	-40°C +100°C (T max air = +70°C)
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA ALFATECH 3000 SUPERTUFF ID... - WP ... MPa - (... PSI) - SAE 100 R17 - DN ... - Q/yr
Note	SPECIFICATION REFERENCE SAE 100 R17 EN 857 1SC (1/4, 5/6, 3/8) EN 857 2SC (3/4, 1)

Code	Constr.	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
		mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
877AA00600VSB8	1B	6	1/4	-4	12,1	0,48	22,5	3250	90	13000	50	2	0,17	11
877AA01000VSB8	1B	10	3/8	-6	15,6	0,61	21	3000	84	12000	65	2,6	0,26	17
877AA01200VSB8	1B	13	1/2	-8	19,5	0,77	21	3000	84	12000	90	3,6	0,41	27
877AA00500VSB8	1B	5	3/16	-3	10,5	0,41	21	3000	84	12000	40	1,6	0,1	7
877AA01600VSB8	2B	16	5/8	-10	23,7	0,93	21	3000	84	12000	105	4,2	0,6	40
8A9AA02000UJB8	2B	19	3/4	-12	27,7	1,09	24	3500	96	14000	125	5	0,81	54
8A9AA02500UJB8	2B	25	1	-16	35,6	1,4	21	3000	84	12000	150	6	1,23	82

SUPERTUFF - MSHA - ABRASION RESISTANT
8A6AA
AT5K SUPERTUFF -MSHA
ALFAGOMMA PROPRIETARY HOSE


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	TWO HIGH TENSILE STEEL BRAIDS, FOUR/SIX HIGH TENSILE STEEL SPIRALS (2B, 4S/ 6S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER. SPECIAL "SUPERTUFF COVER" FOR LONG LASTING LIFE IN HEAVY DUTY HIGH ABRASION APPLICATIONS
Constant operation	-40°C +100°C for braided hose; -40°C +121°C° for spiral hose
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m max over 1"
Branding	ALFATECH 5000 SUPERTUFF I.D. ... WP ... MPa (... PSI) -- MSHA IC-152/7 - Q/yr
Note	SPECIFICATION REFERENCE SAE 100 R16 (1/4) EN 857 2SC (5/16, 3/8) EN 456 4SP (5/8, 3/4) EN 456 4SH (1, 1.1/4) SAE 100 R13 (1.1/2, 2)

Code	Constr.	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8A6AA00600HHA8	2B	6	1/4	-4	13,2	0,52	35	5000	140	20000	51	2	0,27	18
8A9AA00800UJB8	2B	8	5/16	-5	15	0,59	37,5	5500	150	22000	57	2,3	0,32	21
8A9AA01000UJB8	2B	10	3/8	-6	17,4	0,69	35	5000	140	20000	64	2,6	0,4	27
8A6AA01200HHA8	2B	13	1/2	-8	22,2	0,87	35	5000	140	20000	150	6	0,66	44
8A6AA01600HHA8	4S	16	5/8	-10	28,2	1,11	35	5000	140	20000	125	5	1,05	70
8A6AA02000HHA8	4S	19	3/4	-12	32,2	1,27	38	5510	152	22040	140	5,6	1,45	97
8A6AA02500HHA8	4S	25	1	-16	38,7	1,52	38	5510	152	22040	190	7,6	1,94	130
8B9AA03200HHA8	4S	32	1.1/4	-20	45,1	1,78	35	5000	140	20000	210	8,4	2,47	165
8A6AA03800HHA8	6S	38	1.1/2	-24	57,3	2,26	35	5000	140	20000	475	19	4,88	327
8A6AA05100HHA8	6S	51	2	-32	71,1	2,8	35	5000	140	20000	545	21,8	6,62	444

SUPERTUFF - MSHA - ABRASION RESISTANT

8D9AA

AT4K SUPERTUFF - MSHA

ALFAGOMMA PROPRIETARY HOSE



Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	TWO HIGH TENSILE STEEL BRAIDS, FOUR HIGH TENSILE STEEL SPIRALS (2B, 4S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER. SPECIAL "SUPERTUFF COVER" FOR LONG LASTING LIFE IN HEAVY DUTY HIGH ABRASION APPLICATIONS
Constant operation	-40°C +100°C for braided hose; -40°C +121°C° for spiral hose
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m max over 1"
Branding	ALFAGOMMA ALFATECH 4000 SUPERTUFF ID... WP ... MPa - (... PSI) - DN ... MADE IN ITALY - Q/yr
Note	SPECIFICATION REFERENCE SAE 100 R16 (5/16, 3/8) EN 857 2SC (1/2, 5/8) SAE 100 R12 (3/4, 1) EN 456 4SP (1.1/4) EN 456 4SH (1.1/2, 2)

Code	Constr.	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
		mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
8D9AA00800TUB8	2B	8	5/16	-5	14,5	0,57	29,3	4240	117	16000	57	2,3	0,31	21
8D9AA01000TUB8	2B	10	3/8	-6	17	0,67	28	4000	112	16000	64	2,6	0,37	25
8A9AA01200UJB8	2B	13	1/2	-8	20,6	0,81	31	4500	124	18000	90	3,6	0,54	36
8A9AA01600UJB8	2B	16	5/8	-10	23,7	0,93	28	4000	112	16000	101	4	0,62	42
8D9AA02000TUB8	4S	19	3/4	-12	30,7	1,21	28	4000	112	16000	130	5,2	1,24	83
8D9AA02500TUB8	4S	25	1	-16	38	1,5	28	4000	112	16000	150	6	1,81	122
8D9AA03200TUB8	4S	32	1.1/4	-20	47,5	1,87	28	4000	112	16000	230	9,2	2,48	166
8D9AA03800TUB8	4S	38	1.1/2	-24	53,5	2,11	29	4200	116	16800	450	18	3,28	220
8D9AA05100TUB8	4S	51	2	-32	68,1	2,68	28	4000	112	16000	590	23,6	4,68	314

SUPERTUFF - MSHA - ABRASION RESISTANT
8L7AA
AT6K SUPERTUFF - MSHA
SAE 100 R15


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	FOUR HIGH TENSILE STEEL SPIRALS (4S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER. SPECIAL "SUPERTUFF COVER" FOR LONG LASTING LIFE IN HEAVY DUTY HIGH ABRASION APPLICATIONS
Constant operation	-40°C +121°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFATECH 6000 SUPERTUFF I.D. ... WP ... MPa (... PSI) -- MSHA IC-152/7 - Q/yr
Note	SPECIFICATION REFERENCE SAE 100 R15 EN 456 4SP (3/8, 1/2) EN 456 4SH (3/4)

Code	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
	mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
8L7AA01000T8C8	10	3/8	-6	21,4	0,84	44,5	6450	178	25800	180	7,2	0,75	50
8L7AA01200T8C8	13	1/2	-8	24,6	0,97	42	6000	168	24000	230	9,2	0,9	60
8L7AA02000T8C8	19	3/4	-12	32,2	1,27	42	6000	168	24000	267	10,7	1,62	109
8L7AA02500T8C8	25	1	-16	38,7	1,52	42	6000	168	24000	280	11,2	2,2	147

HIGH & LOW TEMPERATURE APPLICATIONS

814AE

TEMP TECH 1SN - BLUE COVER

EN 853 1SN - SAE 100 R1AT



Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	ONE HIGH TENSILE STEEL BRAID (1B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER. SPECIALLY DESIGNED FOR HIGH TEMPERATURE APPLICATIONS
Constant operation	-40°C +150°C
Ambient temperature	
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m max over 1"
Branding	ALFAGOMMA - TEMP TECH 1SN ID... - WP ... MPa (... PSI) EN 853 1SN - DN ... - (MAX + 150° C) - Q/yr
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
814AE00600CAB8	6	1/4	-4	13,4	0,53	22,5	3260	90	13080	100	4	0,22	15
814AE01000CAB8	10	3/8	-6	17,4	0,69	18	2610	72	10460	130	5,2	0,32	21
814AE01200CAB8	13	1/2	-8	20,6	0,81	16	2320	64	9280	180	7,2	0,42	28
814AE01600CAB8	16	5/8	-10	23,7	0,93	13	1890	52	7560	200	8	0,51	34
814AE02000CAB8	19	3/4	-12	27,7	1,09	10,5	1530	42	6120	240	9,6	0,61	41
814AE02500CAB8	25	1	-16	35,6	1,4	8,8	1280	35	5120	300	12	0,93	62
814AE03244CAB8	32	1.1/4	-20	43,5	1,71	6,3	920	25	3680	420	16,8	1,29	86
814AE03851CAB8	38	1.1/2	-24	50,6	1,99	5	730	20	2920	500	20	1,48	99
814AE05164CAB8	51	2	-32	64	2,52	4	580	16	2320	630	25,2	2	134

819AA
FLEXOR 1SN-HT
EN 853 1SN - SAE 100 R1AT



Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	ONE HIGH TENSILE STEEL BRAID (1B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER. SPECIALLY DESIGNED FOR HIGH TEMPERATURE APPLICATIONS
Constant operation	-40°C +135°C (T max air = +70°C)
Ambient temperature	-40°C +100°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m over 1"
Branding	ALFAGOMMA FLEXOR 1SN-HT ID... - WP ... MPa (... PSI) - EN 853 1SN - DN ... - Q/yr
Note	S.F.: 4:1

Code	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
	mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
819AA00600G3A8	6	1/4	-4	13,4	0,53	22,5	3270	90	13080	100	4	0,21	14
819AA01000G3A8	10	3/8	-6	17,4	0,69	18	2610	72	10460	130	5,2	0,31	21
819AA01200G3A8	13	1/2	-8	20,6	0,81	16	2320	64	9280	180	7,2	0,41	27
819AA01600G3A8	16	5/8	-10	23,7	0,93	13	1890	52	7560	200	8	0,49	33
819AA02000G3A8	19	3/4	-12	27,7	1,09	10,5	1530	42	6120	240	9,6	0,56	38

HIGH & LOW TEMPERATURE APPLICATIONS

828AE

TEMP TECH 2SN - BLUE COVER

EN 853 2SN - SAE 100 R2AT



Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	TWO HIGH TENSILE STEEL BRAIDS (2B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER. SPECIALLY DESIGNED FOR HIGH TEMPERATURE APPLICATIONS
Constant operation	-40°C +150°C
Ambient temperature	
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA - TEMP TECH 2SN ID... - WP ... MPa (... PSI) EN 853 2SN - DN ... - (MAX + 150 ° C) - Q/yr
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
828AE00600T7C8	6	1/4	-4	15	0,59	40	5800	160	23200	100	4	0,36	24
828AE01000T7C8	10	3/8	-6	19,1	0,75	33	4800	132	19200	125	5	0,51	34
828AE01200T7C8	13	1/2	-8	22,2	0,87	28	4000	112	16000	175	7	0,64	43
828AE01600T7C8	16	5/8	-10	25,4	1	25	3630	100	14520	200	8	0,74	50
828AE02000T7C8	19	3/4	-12	29,3	1,15	21,5	3120	86	12480	240	9,6	0,91	61
828AE02500T7C8	25	1	-16	38,1	1,5	16,5	2400	66	9600	300	12	1,32	88
828AE03248T7C8	32	1.1/4	-20	48,3	1,9	12,5	1820	50	7280	420	16,8	1,93	129
828AE03855T7C8	38	1.1/2	-24	54,6	2,15	9	1310	36	5240	500	20	2,41	161
828AE05167T7C8	51	2	-32	67,4	2,65	8	1160	32	4640	630	25,2	2,96	198

8E6AA
FLEXOPAK 2 LT
EN 857 2SC - SAE 100 R16


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	TWO HIGH TENSILE STEEL BRAIDS (2B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER. SPECIALLY DESIGNED FOR LOW TEMPERATURE APPLICATIONS
Constant operation	-50°C +100°C (T max air = +70°C)
Ambient temperature	-50°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA-FLEXOPAK 2LT ID...- WP ...MPa (... PSI)-(LOW TEMP -50°C) SAE 100 R16-EN857 2SC DN... -Q/yr
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8E6AA00600BxB8	6	1/4	-4	13,4	0,53	40	5850	160	23200	64	2,6	0,26	17
8E6AA01000BxB8	10	3/8	-6	17,9	0,7	35	5000	140	20000	90	3,6	0,39	26
8E6AA01200BxB8	13	1/2	-8	20,6	0,81	31	4500	124	18000	115	4,6	0,52	35
8E6AA02000BxB8	19	3/4	-12	27,7	1,09	24	3500	96	14000	152	6,1	0,81	54
8E6AA02500BxB8	25	1	-16	35,7	1,41	18,5	2700	74	10800	190	7,6	1,21	81

HIGH & LOW TEMPERATURE APPLICATIONS**8E7AA****FLEXOPAK 3 LT****ALFAGOMMA PROPRIETARY HOSE**

Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	THREE HIGH TENSILE STEEL BRAIDS (3B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER. SPECIALLY DESIGNED FOR LOW TEMPERATURE APPLICATIONS
Constant operation	-50°C +100°C
Ambient temperature	-50°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA --- FLEXOPAK 3 (LOW TEMP - 50 DEG C) --- (DIAM) ---- Q/yr
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8E7AA012008YB8	13	1/2	-8	24,8	0,98	46,9	6800	188	27200	160	6,4	0,93	62
8E7AA016008YB8	16	5/8	-10	28,3	1,11	41,4	6000	166	24000	200	8	1,09	73
8E7AA020008YB8	19	3/4	-12	32,1	1,26	35,2	5100	141	20400	260	10,4	1,27	85
8E7AA025008YB8	25	1	-16	39,9	1,57	29	4200	116	16800	330	13,2	1,95	131

605AA
FLEXOR 4
SAE 100 R4



Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	HIGH TENSILE TEXTILE CORDS WITH EMBEDDED STEEL HELIX WIRES
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	FUEL, OIL AND HYDRAULIC FLUIDS SUCTION AND DELIVERY WITH UP TO 50% AROMATIC CONTENT. SPECIALLY DESIGNED FOR HYDRAULIC OIL RETURN LINES.
Constant operation	-40°C +100°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	61 m max
Branding	ALFAGOMMA - Italy - T604 SAE 100 R4
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
604AA019296BB0	19	3/4	-12	29	1,14	2,1	300	8	1200	130	5,2	0,79	53
604AA025356BB0	25	1	-16	35	1,38	1,7	250	7	1000	150	6	0,97	65
604AA032426BB0	32	1.1/4	-20	42	1,65	1,4	200	6	800	200	8	1,19	80
604AA038496BB0	38	1.1/2	-24	49	1,93	1	150	4	600	250	10	1,36	91
604AA051626BB0	51	2	-32	62	2,44	0,7	100	3	400	300	12	1,76	118
604AA063766BB0	64	2.1/2	-40	76	2,99	0,4	62	2	250	360	14,4	2,57	172
604AA076896BB0	76	3	-48	89	3,5	0,4	56	2	225	460	18,4	3,03	203
604AA090046BB0	90	3.1/2	-56	104	4,09	0,3	45	1	180	530	21,2	3,61	242
604AA102166BB0	102	4	-64	116	4,57	0,2	35	1	140	610	24,4	4,1	275

PRESSURE WASH**8B3AA****ALFAJET 210 - BLACK COVER****ALFAGOMMA PROPRIETARY HOSE**

Tube	OIL, DETERGENTS AND HOT WATER RESISTANT SYNTHETIC RUBBER
Reinforcement	ONE HIGH TENSILE STEEL BRAID (1B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER - PIN PRICKED
Application	HIGH PRESSURE POWER CLEANERS. SPECIALLY DESIGNED FOR HOT WATER APPLICATIONS NOT RECOMMENDED FOR STEAM SERVICE
Constant operation	-40°C +155°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA ALFAJET 210 - ID... - DN ... - ... BAR W.P. - 155° C - Q/yr
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8B3AA006008UA9	6	1/4	-4	12,1	0,48	21	3000	84	12000	50	2	0,17	11
8B3AA008008UA9	8	5/16	-5	14,1	0,56	21	3000	84	12000	60	2,4	0,22	15
8B3AA010008UA9	10	3/8	-6	15,6	0,61	21	3000	84	12000	65	2,6	0,27	18
8B3AA012008UA9	13	1/2	-8	19,5	0,77	21	3000	84	12000	90	3,6	0,41	27

8B3AE
ALFAJET 210 - BLUE COVER
ALFAGOMMA PROPRIETARY HOSE


Tube	OIL, DETERGENTS AND HOT WATER RESISTANT SYNTHETIC RUBBER
Reinforcement	ONE HIGH TENSILE STEEL BRAID (1B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER - PIN PRICKED
Application	HIGH PRESSURE POWER CLEANERS. SPECIALLY DESIGNED FOR HOT WATER APPLICATIONS NOT RECOMMENDED FOR STEAM SERVICE
Constant operation	-40°C +155°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA ALFAJET 210 - ID... - DN ... - ... BAR W.P. - 155° C - Q/yr
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8B3AE006008UA9	6	1/4	-4	12,1	0,48	21	3000	84	12000	50	2	0,18	12
8B3AE008008UA9	8	5/16	-5	14,1	0,56	21	3000	84	12000	60	2,4	0,23	15
8B3AE010008UA9	10	3/8	-6	15,6	0,61	21	3000	84	12000	65	2,6	0,28	19
8B3AE012008UA9	13	1/2	-8	19,5	0,77	21	3000	84	12000	90	3,6	0,42	28

PRESSURE WASH**8B4AA****ALFAJET 400 - BLACK COVER****ALFAGOMMA PROPRIETARY HOSE**

Tube	OIL, DETERGENTS AND HOT WATER RESISTANT SYNTHETIC RUBBER
Reinforcement	TWO HIGH TENSILE STEEL BRAIDS (2B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER - PIN PRICKED
Application	HIGH PRESSURE POWER CLEANERS. SPECIALLY DESIGNED FOR HOT WATER APPLICATIONS. NOT RECOMMENDED FOR STEAM SERVICE
Constant operation	-40°C +155°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA ALFAJET 400 - ID... - DN ... - ... BAR W.P. - 155° C -
Note	S.F.: 3:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8B4AA006008VA9	6	1/4	-4	13,4	0,53	40	5800	160	23200	70	2,8	0,27	18
8B4AA008008VA9	8	5/16	-5	15	0,59	40	5800	150	22000	76	3	0,32	21
8B4AA010008VA9	10	3/8	-6	17,4	0,69	40	5800	140	20000	90	3,6	0,4	27
8B4AA012008VA9	13	1/2	-8	20,6	0,81	40	5800	120	18000	115	4,6	0,53	36

8B4AE
ALFAJET 400 - BLUE COVER
ALFAGOMMA PROPRIETARY HOSE


Tube	OIL, DETERGENTS AND HOT WATER RESISTANT SYNTHETIC RUBBER
Reinforcement	TWO HIGH TENSILE STEEL BRAIDS (2B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER - PIN PRICKED
Application	HIGH PRESSURE POWER CLEANERS. SPECIALLY DESIGNED FOR HOT WATER APPLICATIONS. NOT RECOMMENDED FOR STEAM SERVICE
Constant operation	-40°C +155°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA ALFAJET 400 - ID... - DN ... - ... BAR W.P. - 155° C -
Note	S.F.: 3:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8B4AE006008VA9	6	1/4	-4	13,4	0,53	40	5800	160	23200	70	2,8	0,28	19
8B4AE008008VA9	8	5/16	-5	15	0,59	40	5800	150	22000	76	3	0,31	21
8B4AE010008VA9	10	3/8	-6	17,4	0,69	40	5800	140	20000	90	3,6	0,4	27
8B4AE012008VA9	13	1/2	-8	20,6	0,81	40	5800	120	18000	115	4,6	0,55	37

PRESSURE WASH**8D1AA****ALFAJET 315 - BLACK COVER****ALFAGOMMA PROPRIETARY HOSE**

Tube	OIL, DETERGENTS AND HOT WATER RESISTANT SYNTHETIC RUBBER
Reinforcement	ONE HIGH TENSILE STEEL BRAID (1B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER - PIN PRICKED
Application	HIGH PRESSURE POWER CLEANERS. SPECIALLY DESIGNED FOR HOT WATER APPLICATIONS NOT RECOMMENDED FOR STEAM SERVICE
Constant operation	-40°C +155°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAJET 315 - ID ... - ... BAR - 155°C - Q/yr
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8D1AA0080019B9	8	5/16	-5	14,1	0,56	31,5	4600	126	18400	60	2,4	0,22	15

8D1AE
ALFAJET 315 - BLUE COVER
ALFAGOMMA PROPRIETARY HOSE


Tube	OIL, DETERGENTS AND HOT WATER RESISTANT SYNTHETIC RUBBER
Reinforcement	ONE HIGH TENSILE STEEL BRAID (1B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER - PIN PRICKED
Application	HIGH PRESSURE POWER CLEANERS. SPECIALLY DESIGNED FOR HOT WATER APPLICATIONS NOT RECOMMENDED FOR STEAM SERVICE
Constant operation	-40°C +155°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAJET 315 - ID ... - ... BAR - 155°C - Q/yr
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8D1AE0080019B9	8	5/16	-5	14,1	0,56	31,5	4600	126	18400	60	2,4	0,23	15

WATER BLASTING**881AA****FLEXORBLAST 50K****ALFAGOMMA PROPRIETARY HOSE**

Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	SIX HIGH TENSILE STEEL SPIRALS (6S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE WATER JETTING
Constant operation	-40°C +93°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA FLEXORBLAST 50K ID ... MPa ... - ... PSI WATERBLAST USE ONLY MADE IN ITALY - Q/yr
Note	S.F.: 2,5:1

Code	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
	mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
881AA0120035A8	13	1/2	-8	29,4	1,16	140	20000	350	50000	200	8	1,76	118

889AA
FLEXORBLAST 30K
ALFAGOMMA PROPRIETARY HOSE


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	FOUR HIGH TENSILE STEEL SPIRALS (4S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE WATER JETTING
Constant operation	-40°C +93°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA FLEXORBLAST 30K ID ... WP ... MPa - PSI WATERBLAST USE ONLY MADE IN ITALY - Q/yr
Note	S.F.: 2,5:1

Code	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
	mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
889AA010005DA8	10	3/8	-6	22,2	0,87	84	12000	210	30000	150	6	0,76	51
889AA012005DA8	13	1/2	-8	25,4	1	84	12000	210	30000	200	8	1,16	78

WATER BLASTING**890AA****FLEXORBLAST 36K****ALFAGOMMA PROPRIETARY HOSE**

Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	FOUR/SIX HIGH TENSILE STEEL SPIRALS (4S/ 6S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE WATER JETTING
Constant operation	-40°C +93°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA FLEXORBLAST 36K ID ... WP ... MPa - ... PSI WATERBLAST USE ONLY MADE IN ITALY - Q/yr
Note	S.F.: 2,5:1

Code	Constr.	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
		mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
890AA012001JB8	4S	13	1/2	-8	29	1,14	100	14500	250	36250	203	8,1	1,36	91
890AA020001JB8	6S	19	3/4	-12	34,4	1,35	100	14500	250	36250	270	10,8	2,29	153

891AA
FLEXORBLAST 45K
ALFAGOMMA PROPRIETARY HOSE


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	SIX HIGH TENSILE STEEL SPIRALS (6S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE WATER JETTING
Constant operation	-40°C +93°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA FLEXORBLAST 45K ID ... WP ... MPa - ... PSI WATERBLAST USE ONLY MADE IN ITALY - Q/yr
Note	S.F.: 2,5:1

Code	ID	ID	Dash	OD	OD	WP	WP	BP	BP	BR	BR	Weight	Weight
	mm	in		mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/C ft
891AA01200W5A8	13	1/2	-8	29,1	1,15	124	18000	310	45000	200	8	1,78	119

WATER BLASTING

8B7AA

FLEXORBLAST 25K

ALFAGOMMA PROPRIETARY HOSE



Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	FOUR HIGH TENSILE STEEL SPIRALS (4S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE WATER JETTING
Constant operation	-40°C +93°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	ALFAGOMMA FLEXORBLAST 25K ID ... WP ... MPa - ... PSI WATERBLAST USE ONLY MADE IN ITALY - Q/yr
Note	S.F.: 2,5:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8B7AA020002WA8	19	3/4	-12	32,2	1,27	70	10000	175	25000	280	11,2	1,62	109
8B7AA025002WA8	25	1	-16	38,7	1,52	70	10000	175	25000	320	12,8	1,99	133

170AA
FLEXOR SLIM HOLE
ALFAGOMMA PROPRIETARY HOSE


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	THREE/FOUR HIGH TENSILE STEEL BRAIDS (3B/ 4B)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	ROTARY HOSE, SPECIALLY DESIGNED FOR USE IN PORTABLE, WORK-OVER AND SEISMOGRAPH DRILLING RIGS
Constant operation	-40°C +93°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	30 m max
Branding	Q/yr
Note	S.F.: 4:1

Code	Constr.	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
170AA06386AAA8	3B	64	2.1/2	-40	86	3,39	10,5	1500	42	6000	760	30,4	5,23	350
170AA06393AAA8	3B	64	2.1/2	-40	93	3,66	10,5	1500	42	6000	760	30,4	6,65	446
170AA07600AAA8	4B	76	3	-48	100	3,94	10,5	1500	42	6000	910	36,4	6,7	449
170AA07605AAA8	4B	76	3	-48	105	4,13	10,5	1500	42	6000	910	36,4	7,78	521