

α STEP-One

All-in-one motor/driver/controller
Easy to install - Easy to operate



αSTEP-One

α STEP-One is an all-in-one α STEP motor which integrates the controller features required for positioning operation. Compared to our existing products, the installation requires less space thanks to the simpler configuration and less time thanks to fewer cables. In addition, new features are added to achieve high speed positioning operation and user convenience.

■ Features

1. Inherits all features of α STEP

- α STEP-One never miss steps because controller mode switches to closed loop control when the motor is about to miss steps due to overload or sudden acceleration.
- α STEP-One is excellent for low rigidity mechanics without gain tuning.

2. All-in-one (Motor + Driver + Controller)



- With unique heat separation technology, α STEP-One achieves the same performance as our component type products.
- α STEP-One does not require cables to connect each component. Not only is the installation easy, but also the troubles caused by noise can be eliminated.
- The space required is 40% of that of the existing product.

3. Various system structures

- PC/PLC control (RS-232C)
- Pulse input
- Parallel I/O control (Program operation)

4. New features

- Generates the best operation pattern (Fastest positioning operation)
- Adaptive user unit operation (mm, Inch, Rev. ...)
- Auto-current control (low heat generation)
- Graphical User Interface (Immediate Motion Creator)

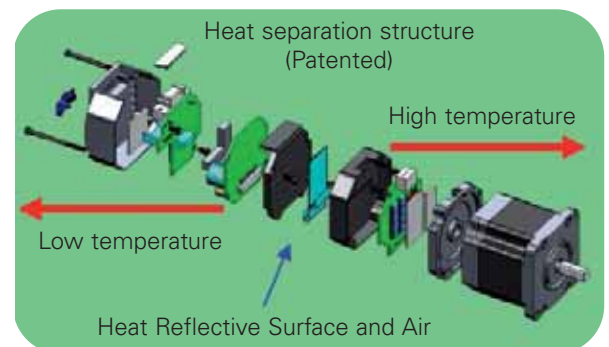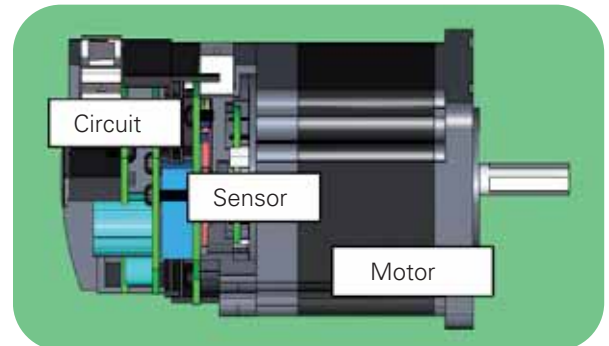

Easy to install


■ One-touch lock connector

All connectors have one-touch lock so that it can easily be installed in narrow locations.

■ System configurations


1. PC control

α STEP-One operates by commands from PC. This is the simplest configuration.

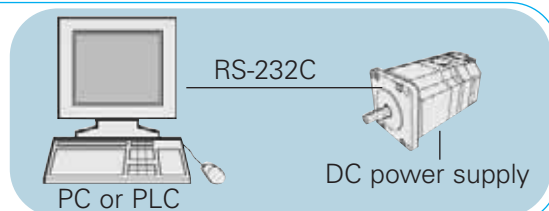


2. Pulse input

Like the existing α STEP, α STEP-One can operate with pulse input.

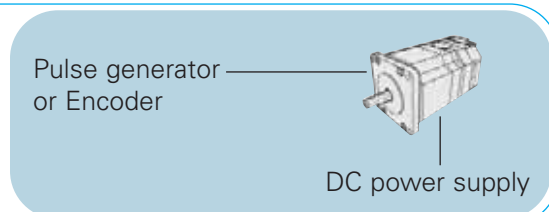

3. Parallel I/O control

Based on the saved program, operation can be controlled with I/O.

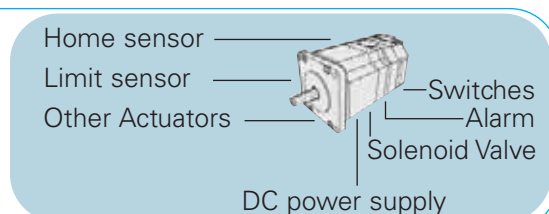

Easy to operate


α STEP-One can generate the best operation pattern with position data input. With this feature, the fastest positioning operation can be achieved anytime. α STEP-One can be controlled easily with our exclusive software (Immediate Motion Creator).

■ Generation of the best operation pattern

- Existing products need user calculation, and acceleration/deceleration rate is based on the torque available at the maximum required rotational speed.

However, α STEP-One calculates the best operation pattern automatically, and the acceleration/deceleration rate is based on the torque available at each rotational speed. With this method, the motor makes use of the most torque available. Thus the calculated operation pattern becomes the fastest.

*) To generate the best operation pattern, the information of load such as inertia and friction should be provided. In case of unknown load, the load estimation feature can be used.

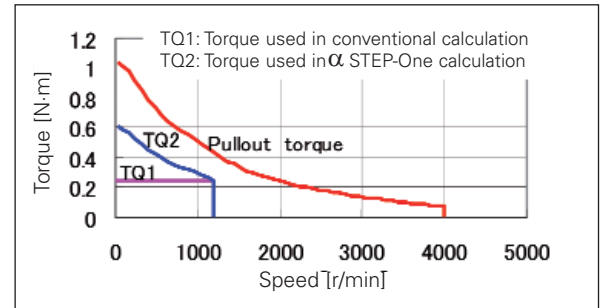

■ Main features of Immediate Motion Creator (IMC)

1. Sending commands


One click on the START button starts the motor based on the position and the speed provided. Writing/Reading of the program can be done with just a single button.

2. Programming editor

Programs can be made by drag and drop in addition to the common typing methods.


3. Wave monitor

Generated operation pattern and operation status can be monitored.

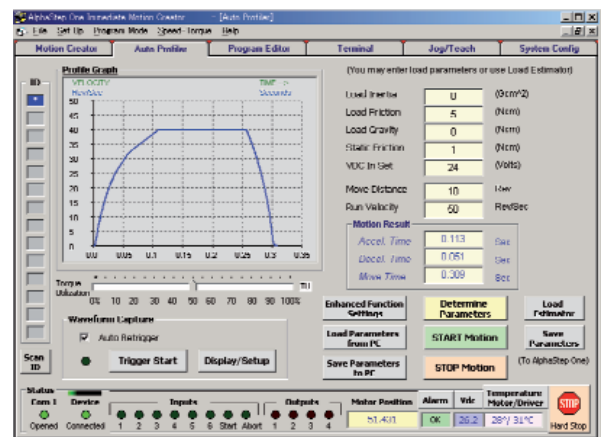


Characteristics/Features

Equivalent capability as existing models, can be substituted with existing models.

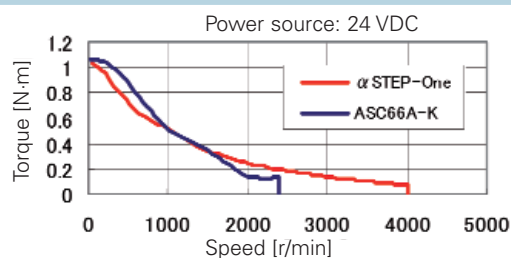


Auto-current setting
(low heat generation and low vibration)

Pre-adjustment of the current at constant speed reduces heat accompanied with losses and vibration.

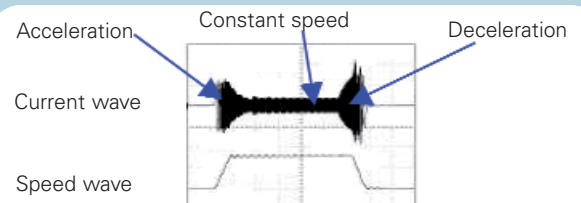


Multi-axis(Daisy chain)

Can be connected up to 36 axes via RS-232C cable.

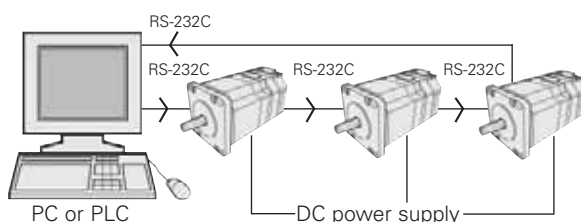

Jerk regulation (Low vibration)

Reduce vibration and audible noise by regulating sudden change in acceleration and deceleration.

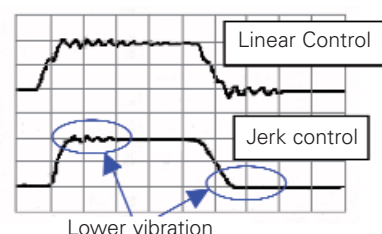


Specifications


Model		ASX66A-1/ASX66A-2
Maximum Holding torque	N·m	1.0
Rotor Inertia J	kg·m ²	405 × 10 ⁻⁷
Static angle error	minutes	± 5
Resolution		1 ~ 51200
Power Source		DC12 ~ 48V 4A Maximum
Insulation Resistance		100MΩ minimum when measured by a 500 VDC megger between the following places: - Heat Sink-Power Supply Terminal
Dielectric Strength		Sufficient to withstand the following for one minute - Heat Sink-Power Supply Terminal 830 VDC
Operating Environment	Ambient temperature	0°C ~ +40°C (nonfreezing)
	Ambient Humidity	85% or less (noncondensing)
	Atmosphere	No corrosive gases, dust, water and oil.

* Basic package, ASX66A-1 includes motor, power connector, wire insert tool and communication connector. Developer's package, ASX66A-2 includes communication cable, I/O cable, GUI CD and operating manual in addition to contents of basic package.

Speed-Torque Characteristics

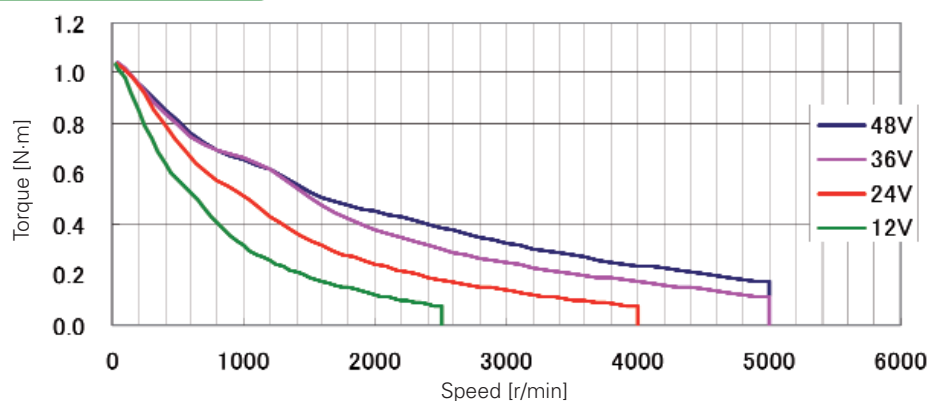

Dimensions

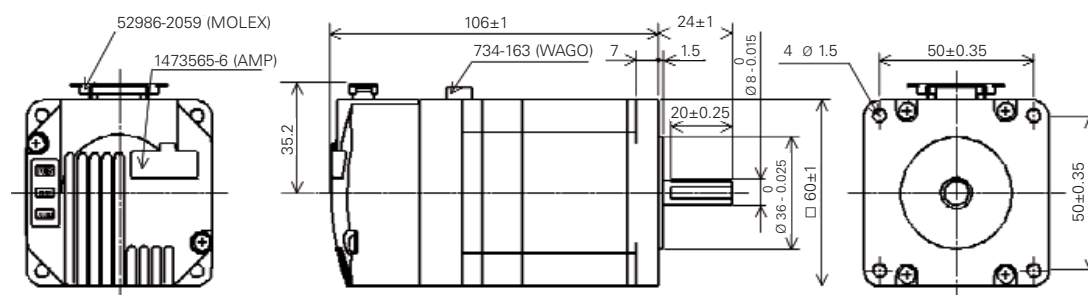

Orientalmotor

These products are manufactured at plants certified with the international standards **ISO 9001** (for quality assurance) and **ISO 14001** (for systems of environmental management).

Specifications are subject to change without notice.
Published in May 2008 / Printed in Germany.

ORIENTAL MOTOR (EUROPA) GmbH

www.orientalmotor.de

European Headquarters and Düsseldorf Office
Schiesstraße 74
40549 Düsseldorf, Germany
Tel: 0211-5206700 Fax: 0211-52067099

Munich Office

Carl-von-Linde-Straße 42
85716 Unterschleißheim, Germany
Tel: 089-318122500 Fax: 089-318122525

Hamburg Office

Meckelfelder Weg 2
21079 Hamburg, Germany
Tel: 040-76910443 Fax: 040-76910445

Jena Office

Wildenbruchstraße 15
07745 Jena, Germany
Tel: 03641-675280 Fax: 03641-675288

Stuttgart Office

Tel: 07335-924853 Fax: 07335-924854

ORIENTAL MOTOR (UK) LTD.

www.orientalmotor.co.uk

Unit 5, Faraday Office Park,
Rankine Road, Basingstoke,
Hampshire RG24 8AH, U.K.
Tel: 01256-347090 Fax: 01256-347099

ORIENTAL MOTOR (FRANCE) SARL

www.orientalmotor.fr

France Headquarters

32, Avenue de l'île Saint-Martin
92737 Nanterre Cedex, France
Tel: 01 47 86 97 50 Fax: 01 47 82 45 16

Lyon Office

10, Allée des Sorbiers
69673 Bron Cedex, France
Tel: 04 78 41 15 02 Fax: 04 78 41 15 90

ORIENTAL MOTOR ITALIA s.r.l.

www.orientalmotor.it

Italy Headquarters

Via A. De Gasperi, 85
20017 Mazza di Rho (MI), Italy
Tel: 02-93906346 Fax: 02-93906348

Bologna Office

Via Mori, 6
40054 Prunaro di Budrio (BO), Italy
Tel: 051-6931249 Fax: 051-6929266

Verona Office

Piazza Roma, 3/A
37066 Sommacampagna (VR), Italy
Tel: 045-8961049 Fax: 045-8971978

ORIENTAL MOTOR CO., LTD.

www.orientalmotor.co.jp

Headquarters

16-17, Ueno 6-chome
Taito-ku, Tokyo 110-8536, Japan
Tel: (03)3835-0684 Fax: (03)3835-1890